

Ribbon-Wood Barcode



Ribbon-Wood Barcode

Ribbon-Wood Barcode is an acoustic panel consisting of ribs with veneered MDF that sits on an acoustic blanket, Recosilent. A large selection of veneers from our own production, as well as several options among surface treatments, together with black and light gray Recosilent means that the options are many for you to find a rib panel that suits you. In addition to our standard range, we can also solve most things in terms of wood type, size, surface treatment or other adaptations you may be interested in.

RIBBON-WOOD BARCODE

Ribbon-Wood Barcode is part of the WallSystems by Glimakra of Sweden product portfolio. We are a Swedish company with value-driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Along with these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra and Tranås. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

INFORMATION

Surface layer	0.6mm FSC certified veneer.
Surface treatment	Stained or untreated.
Sheet material	12 mm standard or solid black MDF
Acoustic blanket	RecoSilent (RS), 9mm recycled PET. Black or light gray.
Thickness	22 mm
Sizes	2400x600mm or 2960x600mm. Can be cut for extra.
Assembly	Screw (15 pcs / panel) or glued (0.5 / panel) easily in place.
Manufacturing	Tranås and Glimåkra

SUSTAINABILITY

Ribbon-Wood Barcode uses only wood for veneers from sustainably managed forests in accordance with the FSC's guidelines. The product meets Möbelfakta's requirements for the environment and responsible supply chains.

PRESCRIPTION TEXT

Ribbon-Wood Barcode, Classic Oak Barcode black RecoSilent, 2400x600mm

FIRE PROPERTIES

Standard range:

Acoustic felt	RecoSilent B-s1,d0
Wooden slats	D-s2,d0
FR (FR = Fireclass)	
Acoustic felt	RecoSilent B-s1,d0
Wooden slats	B-s1,d0 or B-s2,d0

Prescription text at FR: Ribbon-Wood, Article name + FR




Ex. Wall system, Classic Oak black RecoSilent, 2400x600mm, FR

CERTIFICATE

Ribbon-Wood Barcode is sound tested with original pattern. As Barcode has a slightly more comprehensive pattern, we estimate the acoustic effect to be at least 80% of the corresponding classification A-D with original patterns.

Acoustics SS-EN ISO 354: 2003 evaluated according to SS-EN ISO 11654: 1997. Test report no. 21-755-R1. Date: 2021-12-09 (Acoustics workshop, laboratory accredited by Swedack)

Mounting directly to wall	Report 21-755-M41	w 0.35 (MH) Absorption class D
Mounting with 45mm air gap	Report 21-755-M2	w 0.6 (MH) Absorption class C
Mounting with 45mm mineral wool	Report 21-755-M3	w 1.0 Absorption class A

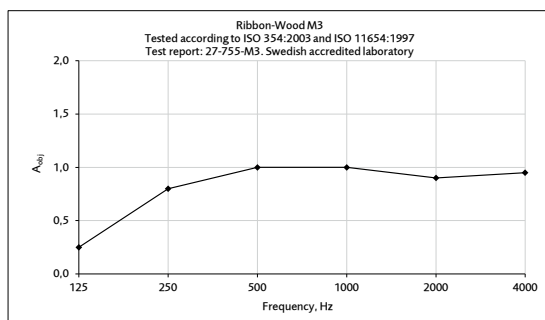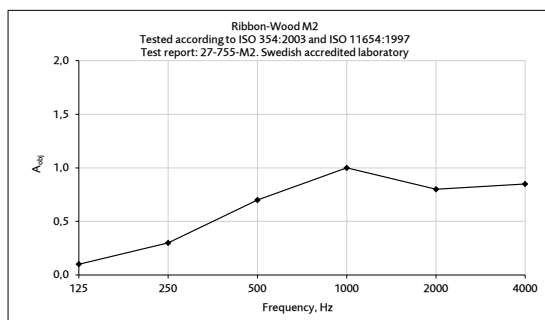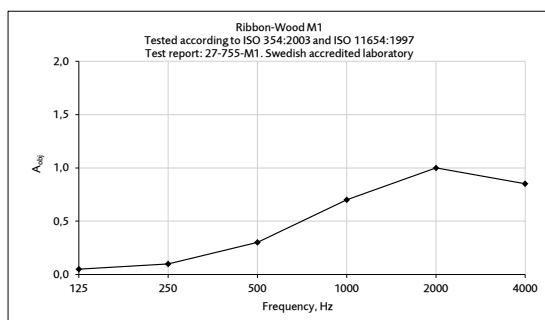


Equivalent absorption area per m² screen area (m²S / m²)

Ribbon-Wood Barcode


MEASURE

2960 x 605 x 21mm (Construction dimensions)

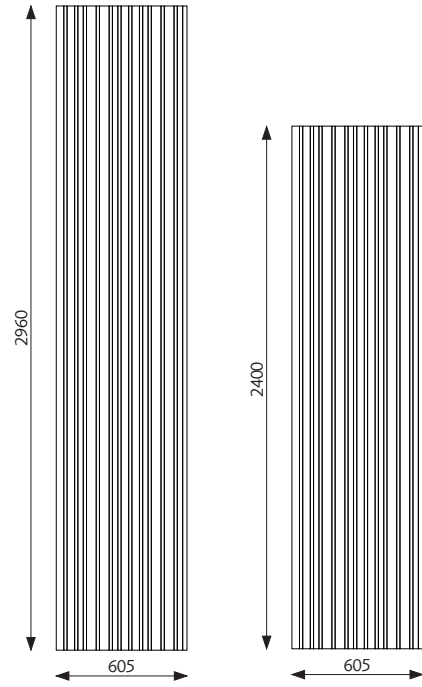


Weight 13kg
Area 1.78m²


Weight 11kg
Area 1.44m²

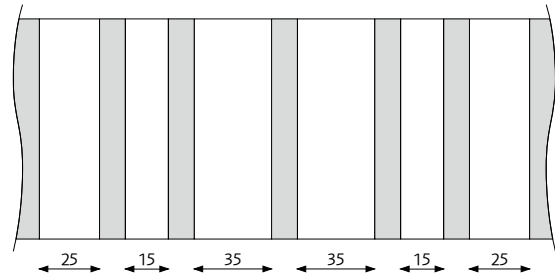

Pattern image

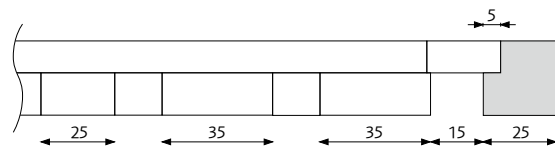


End list



Joint strip

Ribbon-Wood Barcode

OUR STANDARD ASSORTMENT



Classic Ash Barcode,
RS gray




Classic Ash Barcode,
RS black



Classic Oak Barcode,
RS gray



Classic Oak Barcode,
RS black



Black Diamond Ash
Barcode, RS black



Rustic Natural Oak
Barcode, RS black



Rustic Grey Oak Barcode,
RS black



Walnut Barcode,
RS black




End slat



Felt strip

OUR STANDARD ASSORTMENT




Diamond Oak Barcode,
RS black



Diamond Oak Barcode,
RS gray



Diamond Oak Barcode,
RS White




Diamond Ash Barcode,
RS black



Diamond Ash Barcode,
RS grey



Diamond Ash Barcode,
RS White



Diamond Walnut Barcode,
RS black



End slat



Felt strip

Ribbon-Wood Barcode

