


2020 02 26

Technical description

Wallsystems

 **Wallsystems**
by Glimåkra of Sweden

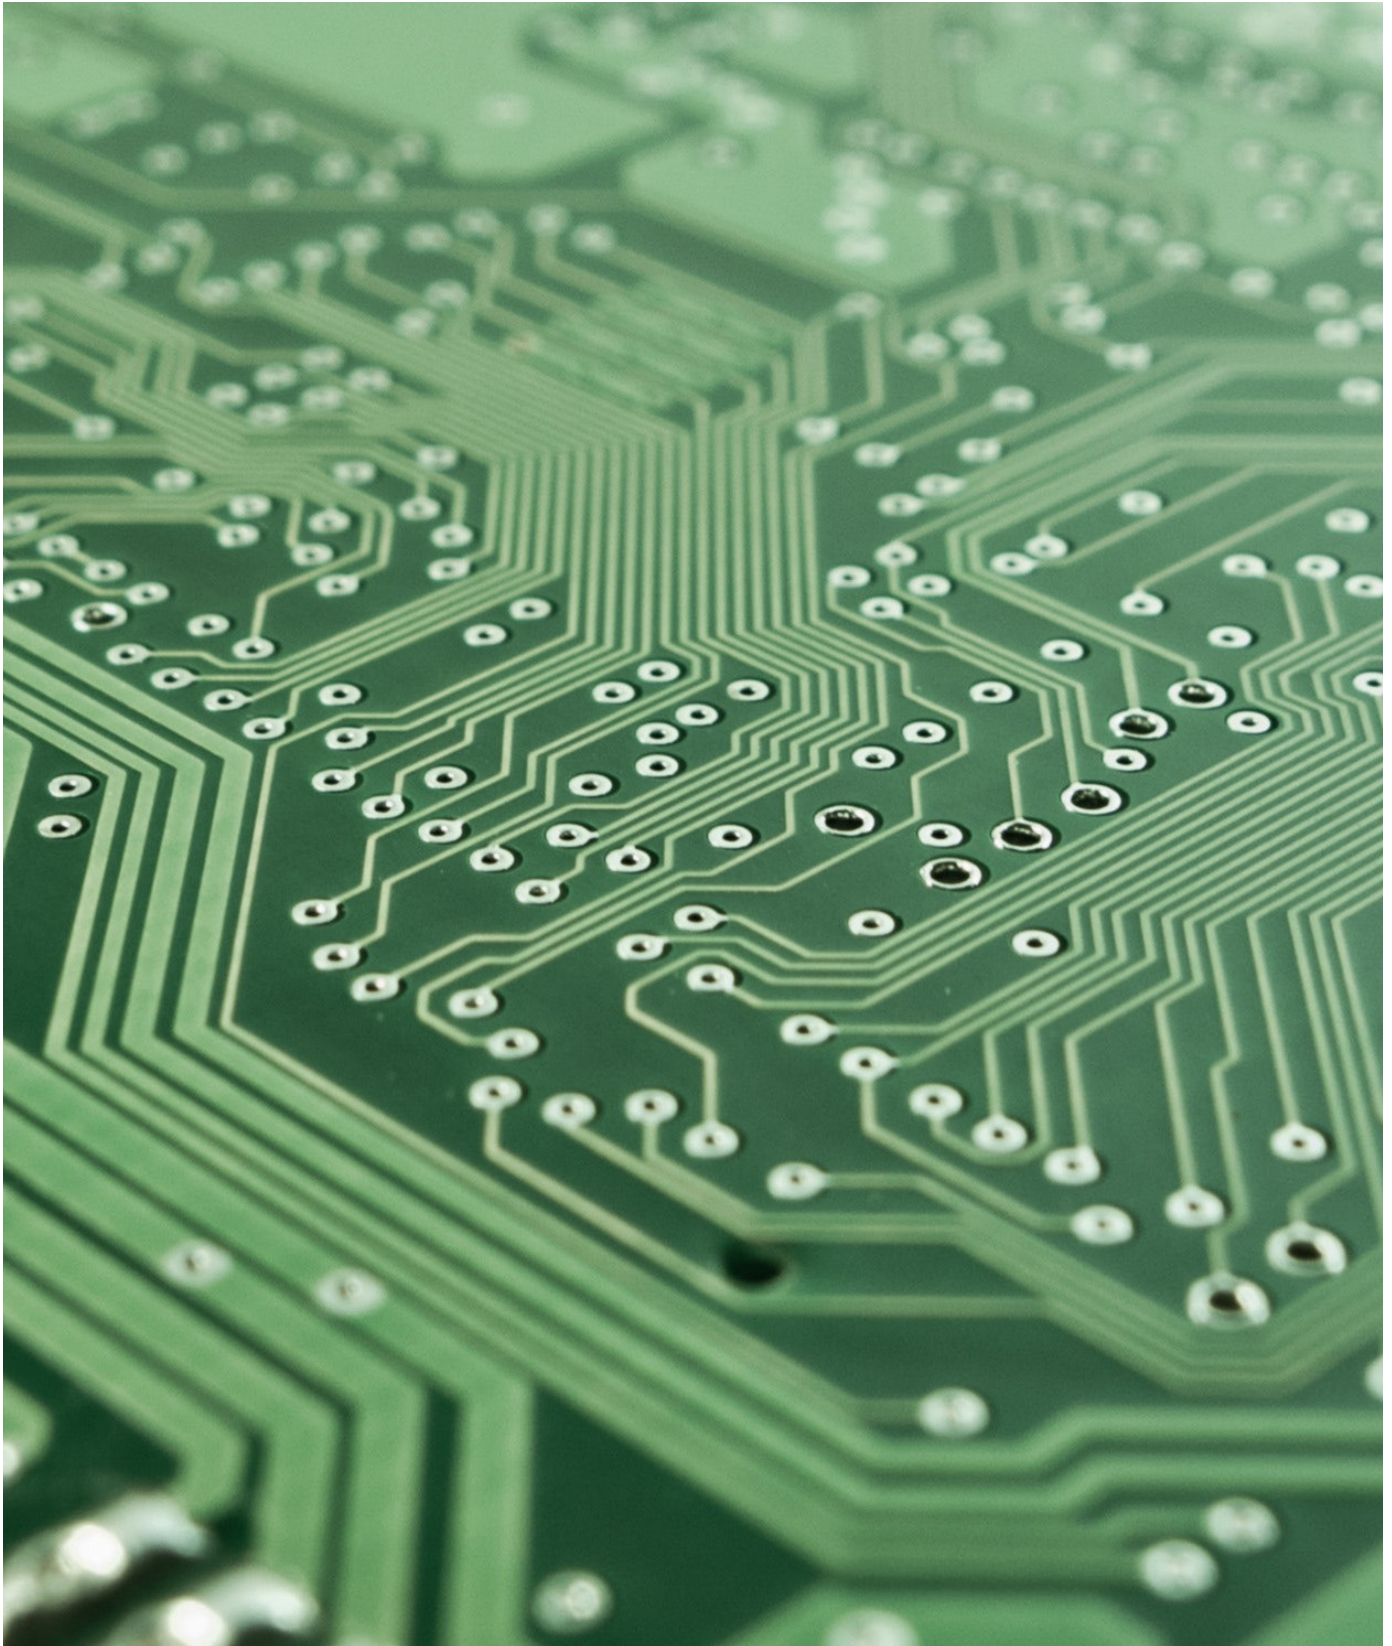

Technical description

Wallsystems



WALL AND SCREEN PANELS

SPACE/FROST

BASIC

SPACE WALL PANEL

FORMAT

Front, end and partition walls 1879x1290 mm.
 Doors 1862x600 mm/900 mm.
 Floor mounted 2000x1290 mm.
 Doors 1951x600 mm/900 mm.
 Can be made up according to customer requirements.

Front walls 1888x1290 mm.
 Partition walls 1904x1290 mm.
 Doors 1860x600mm/900 mm.
 Can be made up according to customer requirements.

The standard is 2405x1290 mm.
 Can be ordered in other formats.

PROFILES

Natural anodised aluminium Ø 40 mm of which the majority are centre-drilled and cut in the right lengths.

Powder-coated aluminium/ brass, of which the majority are centre-drilled.

Natural anodised aluminium of which the majority are centre drilled and cut to the right lengths.

SHOWER SCREEN

Compact high-pressure laminate 1860x900 mm. For attachment to floor/ ceiling or floor/wall with curtain rail.

STRUCTURE

Space
 Compact high-pressure laminate, 9,8 mm thick. ISO 4586/EN 438
 Frost
 Plexi 10 mm thick.

Compact high-pressure laminate 9,8 mm thick.
 ISO 4586/EN 438

Compact high-pressure laminate, 5,2 mm thick.
 EN 438/SS 923601

FLOOR COLUMN

Adjustable column stand between 100-150 mm and 60-70 mm

Adjustable column stand between 90-150 mm

DELIVERY

Ready-made in accordance with drawing. Each order comes with a drawing and assembly instructions in accordance with the planning documents.

FINISHING

Space and Basic can be sawn and drilled with the usual woodworking tools with carbide tips. The edges can be ground and polished but do not need to be painted or protected in any other way against moisture.

CLEANING AND CARE

Space and Basic have a high chemical resistance, which is why they do not require any special care. Stubborn spots are washed with 10% acetic acid or citric acid. Paint, marker, nail varnish spots, etc. can be removed using methylated spirits, acetone, petrol or tetrachloroethylene, followed by rinsing with water and general-purpose detergent. Stubborn spots on Frost washed with 10% acetic acid or citric acid or water and general-purpose detergent. Follow the manufacturer's instructions. Do not use steel wool, scouring powder or any other abrasive preparation, as these can cause white spots on the surface. The durability of Space/Basic also makes it possible to high-pressure clean the system.

LIABILITY

We issue an expanded guarantee in accordance with a special document for Space and Basic screen walls for 10 years.

COMMITMENT

We reserve the rights to make changes in product specifications.



Our products Space and Basic are listed in the database for buildingproducts that can be used in Nordic Swan Ecolabelled buildings.