



# WS-Wood Linear wall panel

Our linear wall panel combines function and design in a carefully considered whole. The pattern of the wood grain continues across the gaps, creating an acoustic wood panel where the unique, natural grain can be followed across the entire surface. Each panel therefore gains its own appearance and character.

The wall panel is carefully designed with its vertical slats to ensure that neither acoustics nor design are compromised. WS Wood Linear is available in two different groove widths: 16 mm or 32 mm, making it an excellent choice for public environments. It is available in four standard veneers but can be produced in virtually any wood species. With an MDF core covered with wood veneer from one of the market's widest selections, and surface treatments available in many variants—such as clear lacquer in different gloss levels, as well as stains and color pigmentations—all naturally applied using water-based lacquer, there is guaranteed to be an option that suits your needs. We use a proven profile system for easy and fast installation with concealed mounting.

## WS-WOOD LINEAR WALL PANEL

WS-Wood Linear wallpanel is a part of the Wallsystems by Glimakra of Sweden product portfolio. We are a Swedish company with value driving factors such as Scandinavian acoustic design, greater flexibility and higher quality. Based on these, we create favorable sound landscapes for different types of environments. With broad knowledge and long experience, we develop and manufacture products in our own factories in Glimåkra. We are the largest in Sweden in wood veneer and through an ongoing collaboration with several prominent designers, we are always at the forefront when it comes to acoustic design.

### TECHNICAL INFORMATION

Surface layer	Veneer
Sheet material	12 mm MDF or plywood.
Edge molding	None, wood veneer if necessary
Surface treatment standard	Water-based UV varnish.
Surface treatment special	Large selection, contact customer-Support, <a href="mailto:info@wallsystems.se">info@wallsystems.se</a> , Pho:+46 0140-412 25.
Thickness	13 mm
Standard dimension in stock	2400x600mm, 2960x600mm.
Other sizes	On request, contact Customer-Support, <a href="mailto:info@wallsystems.se">info@wallsystems.se</a> , Pho:+46 0140-412 25.
Installation system	Hidden profile system or with countersunk screws

### SUSTAINABILITY

WS-Wood Linear wall panel only uses wood for veneer from sustainably managed forests.

### PRESCRIPTION TEXT

WS-Wood Linear wall panel, Diamond Oak 16 mm, 2400x600mm.

### FIRE PROPERTIES

FR (FR=Fireclass):

WS-Wood Linear wall panel Bs1-d0

Prescription text for FR: WS-Wood Linear wall panel, article number + FR

Ex. Wallsystems, WS-Wood Linear wall panel, Diamond Oak 16 mm, 2400x600mm, FR


## STANDARD RANGE



WS-Wood Linear Wallpanel Diamond Ash. 16 mm.



WS-Wood Linear Wallpanel Diamond Ash. 32 mm.

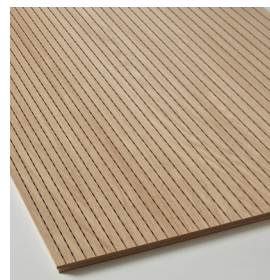

WS-Wood Linear Wall panel Diamond Oak, 16 mm.




WS-Wood Linear Wall panel Diamond Oak, 32 mm.




WS-Wood Linear Wall panel Diamond Walnut, 16 mm.



WS-Wood Linear Wall panel Diamond Walnut, 32 mm.

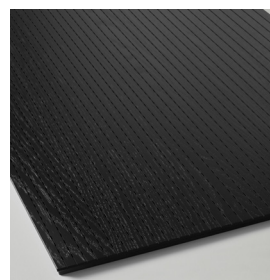


WS-Wood Linear Wall panel Black Diamond Ash, 16 mm.

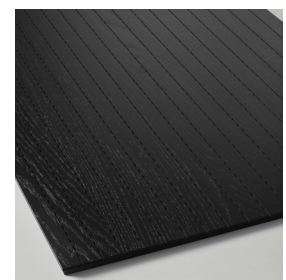


WS-Wood Linear Wall panel Black Diamond Oak, 32 mm.

# WS-Wood Linear wall panel

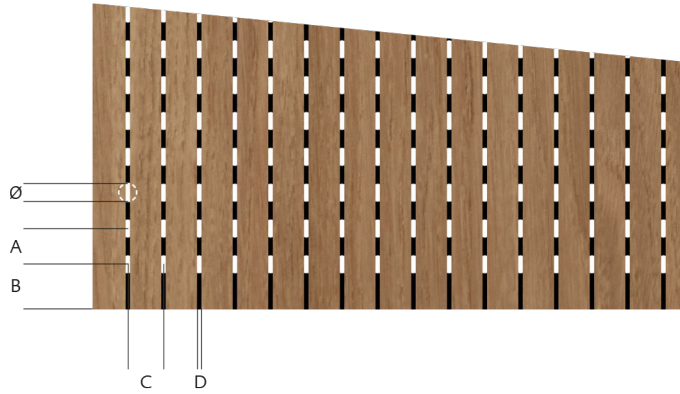

WS-Wood Linear 16mm


Ø = 8 mm  
A = 16 mm  
B = 20,5 mm  
C = 16 mm  
D = 2 mm

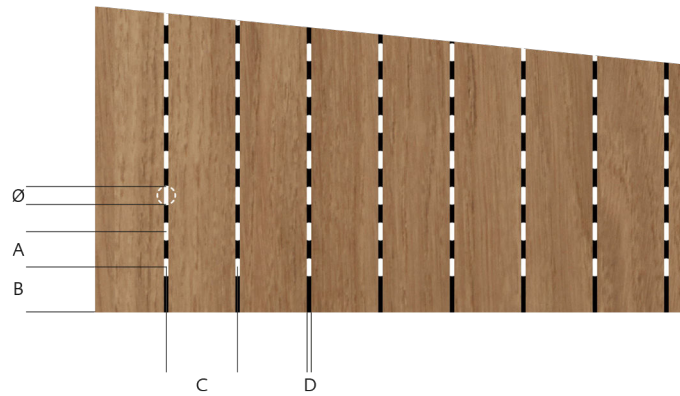


WS-Wood Linear 32mm

Ø = 8 mm  
A = 16 mm  
B = 20,5 mm  
C = 32 mm  
D = 2 mm

WS-Wood Linear wall panel 16mm

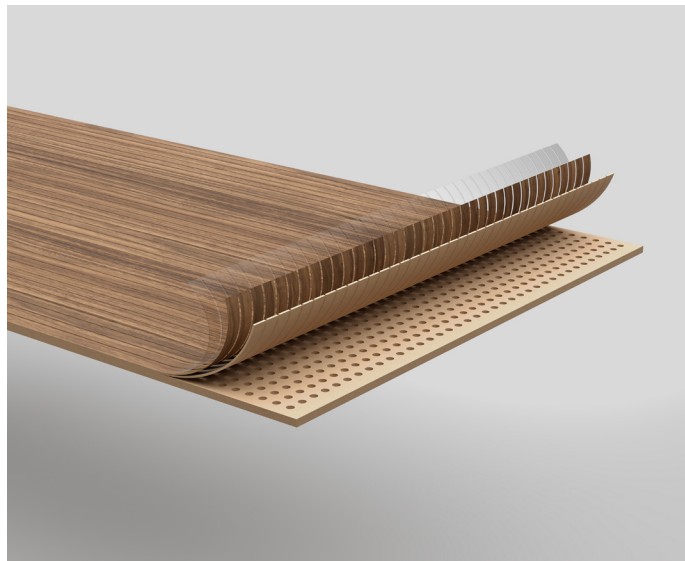

WS-Wood Linear wall panel 32mm

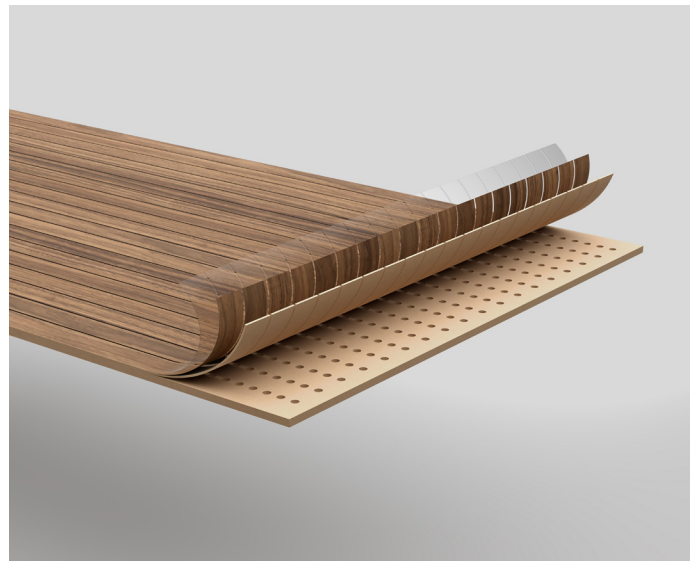

# WS-Wood Linear wall panel



